

ICON SERIES

ICON HD

RECOMMENDED APPLICATIONS



CASINOS



HIGH ROLLING LOADS

SYSTEM NAME

Icon HD Super Heavy Industrial Grade 13.0kN

DESCRIPTION

Icon HD offers an upgrade on Icon X, Icon Data and Icon Air for industrial level panel loads. The upgrade incorporates heavy duty understructure and thicker steel than the standard systems. This provides a longer lifespan with an extended product warranty.

Icon HD is suitable for environments subject to heavy rolling loads such as Casino's and Showrooms.

COMPLIANT STANDARDS

Australian Standard AS4154/AS4155

Australian Standard AS1170

NATA Testing Certification


ISO9239-1-2003

EN12825-2001

DIN4102-1-1998

SIZE

600mm x 600mm

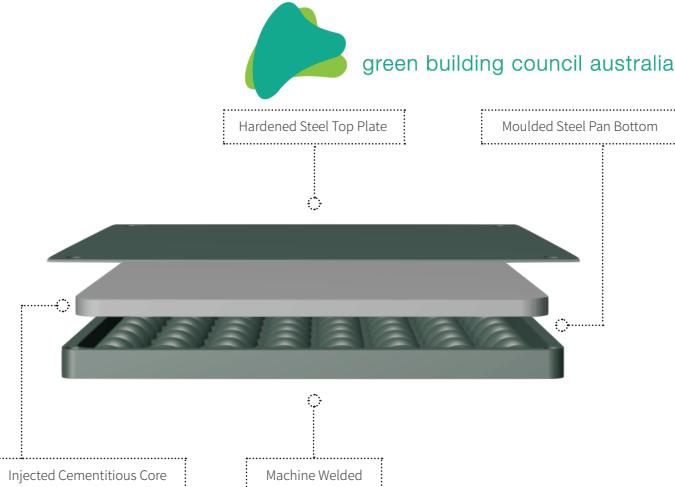

CORE

Cementitious Compound

FINISH

ASP's standard powder coated finish.

CONSTRUCTION

The panels consist of a hardened steel top and bottom sheet plate with corrosion resistant protection, inside and out, encapsulating a structural cementitious core.

TOLERANCE

±0.25mm and a flatness tolerance of ±0.5mm measured on a diagonal across the top of the panel

CONNECTION

The panel is screw fixed on top of the stringer assembly to the pedestal head at all four corners

DEPTH

33mm

PERFORMANCE TO STANDARDS GUIDE PER AS4154 – 1993 AUSTRALIAN STANDARD – GENERAL ACCESS FLOORS

Load Level	Panel (kg)	System (kg/m ² at 150mm FFH)
13.0kN Super Heavy Industrial Grade	21.23	70.44
STATIC PERFORMANCE (kN)		
Concentrated	Impact	Ultimate
13.0	0.4	39.0
DYNAMIC PERFORMANCE (kN) - Passes		
10 passes (wheel size 75x25mm)	10,000 passes (wheel size 150x50mm)	40,000 passes (wheel size 200x75mm)
11.0	8.9	2.25

Safety Factor: Panels must provide a minimum safety factor of three (3) times the concentrated load specified above in accordance with Australian Standards AS4154-1993



PEDESTAL SIZE

128mm x 128mm base plate

PEDESTAL CONSTRUCTION

Hot dipped galvanised steel pedestal base, head and rod. Finished with an ABS locating gasket.

PEDESTAL LOCKING

The pedestals will be provided with an adjusting and locking nut to maintain the assembly at a selected height, which requires a deliberate action to change the height setting, and which prevents vibration displacement.

PEDESTAL FINISH

Hot dipped galvanized finish.

PEDESTAL CONNECTION

The panel is screw fixed to the pedestal head at all four corners.

PEDESTAL FINISHED FLOOR HEIGHT (FFH)

The finished floor height of the access floor is measured from the sub floor to the top surface of the installed access floor.

STRINGER SIZE

35mm x 22mm x 1.8mm x 600mm

STRINGER CONSTRUCTION

Rectangular steel welded tube with 1.6mm sponge rubber foam.

STRINGER FINISH

Hot dipped galvanized finish.

STRINGER CONNECTION

The stringer is screw fixed to the pedestal head.